



Electrolux
PROFESSIONAL

Stainless Steel Preparation 475x1569 mm Aluminum Linear Units

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux
PROFESSIONAL



137038 (BLS1569)

Linear shelving set with aluminium side uprights and 4 polyethylene louvered shelves, 360 Kg load, 475x1569 mm

Short Form Specification

Item No. _____

For linear installation. 4-level shelving set with louvered sectional polyethylene shelves (depth=475mm). Aluminium (20 micron) side uprights (height=1700mm). Adjustable feet.

Main Features

- Complete shelving system allows rapid and easy fixing of the shelves to the uprights.
- GN 1/1, GN 1/2 and GN 1/3 can be inserted into the frame.

Construction

- Uprights and shelf frames constructed entirely in anodized aluminium (20 micron).
- Shelves made by section of polyethylene tablets.
- Sectional polyethylene shelves are dishwasher safe.
- 4 tiers.

Optional Accessories

- Polyethylene shelf with aluminium frame, 475x1505mm PNC 850069
- Angle joint for shelves (depth=475mm) PNC 850071
- 2 swivelling wheels, 100mm PNC 850072
- 2 swivelling wheels with brakes, 100mm PNC 850073


APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com

Stainless Steel Preparation
475x1569 mm Aluminum Linear Units

Front

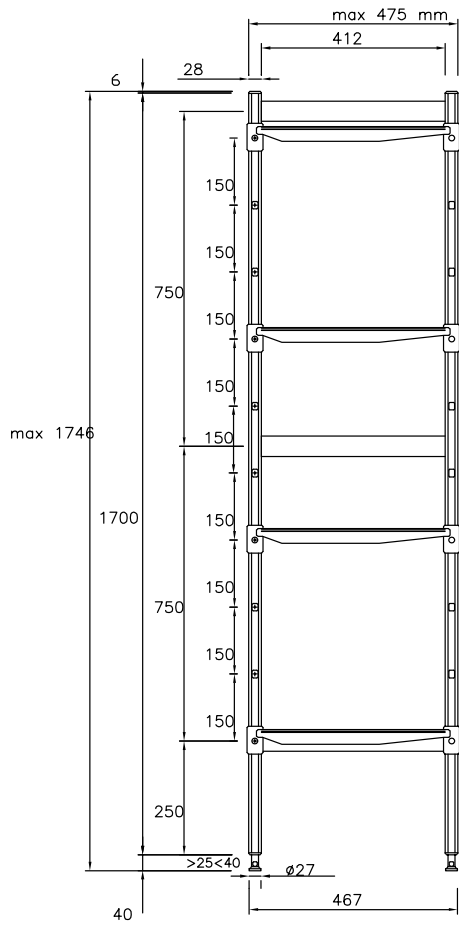

Side

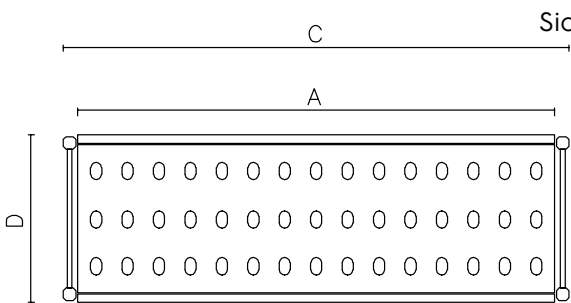

Other

	A mm	C mm	D mm
137030	708	772	475
137031	798	862	475
137032	886	950	475
137033	974	1038	475
137034	1062	1126	475
137035	1152	1216	475
137036	1240	1304	475
137037	1330	1394	475
137038	1505	1569	475

Key Information:

External dimensions, Width:	
137038 (BLS1569)	1569 mm
External dimensions, Height:	1700 mm
External dimensions, Depth:	475 mm
Max loading weight:	360 kg
Net weight:	28 kg
Uprights	2