

Vacuum Packers

Table Top Vacuum Packer -20 m³/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

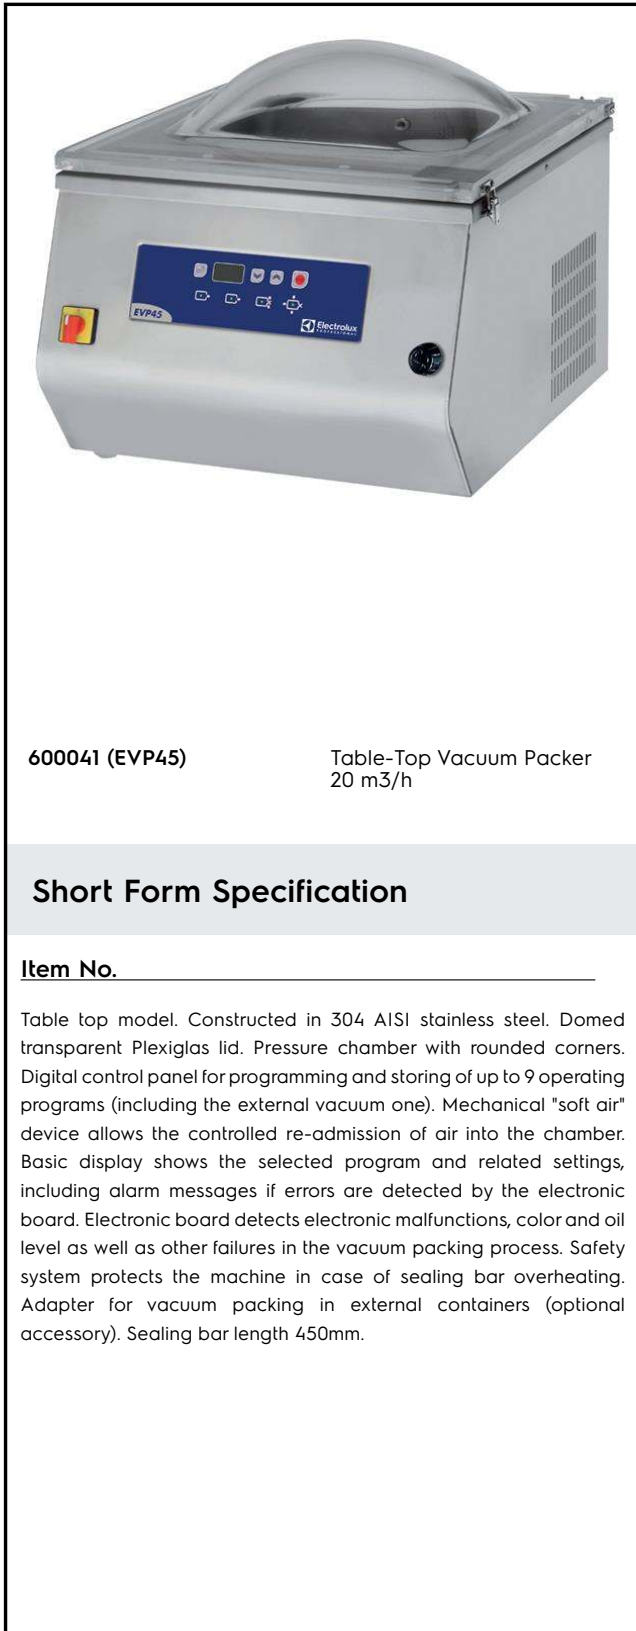

600041 (EVP45)

 Table-Top Vacuum Packer
 20 m³/h

Short Form Specification

Item No.

Table top model. Constructed in 304 AISI stainless steel. Domed transparent Plexiglas lid. Pressure chamber with rounded corners. Digital control panel for programming and storing of up to 9 operating programs (including the external vacuum one). Mechanical "soft air" device allows the controlled re-admission of air into the chamber. Basic display shows the selected program and related settings, including alarm messages if errors are detected by the electronic board. Electronic board detects electronic malfunctions, color and oil level as well as other failures in the vacuum packing process. Safety system protects the machine in case of sealing bar overheating. Adapter for vacuum packing in external containers (optional accessory). Sealing bar length 450mm.

Main Features

- Digital control panel allows the selection of up to 9 operating programs to guarantee optimized vacuum pressure and heat seal time for any product and each program: P1 to P8 are composed of 4 adjustable selections (vacuum, extravacuum, gas and sealing) while P9, "external vacuum" is composed by only 2 selections (vacuum and extravacuum).
- To ensure simplicity of use and maximum reliability electronic board detects electronic malfunctions, color and level of oil as well as failures in the vacuum packaging process.
- "Soft air" device allowing to control the re-admission of air into the chamber.
- Can be equipped with an adapter (available as optional accessory), allowing the vacuum process to take place in external containers or appliances by connecting the external container's pipe to the air sucking valve.
- Safety system protects the machine in case of sealing bar overheat.
- Sealing bar 450 mm.
- Digital control panel allows programming and storing of up to 9 operating programs for a better vacuum pressure and heat seal times.
- Microprocessor automatically controls the exact percentage of negative pressure needed for all the air to be removed.
- Warning light to indicate malfunctioning in the vacuum packing process.

Construction


- Entirely constructed in 304 AISI stainless steel.
- Unit to have a domed transparent Plexiglas lid.
- Pressure chamber with rounded corners.

Optional Accessories

- Inclined filling table to vacuum pack liquids for 20 m³/h vacuum 650010 packers

APPROVAL: _____

Front

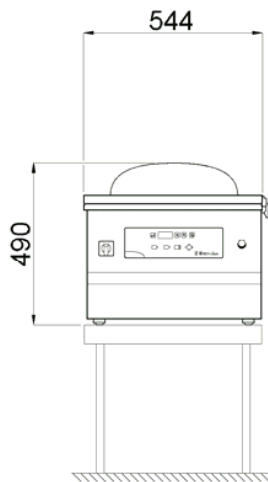
Electric
Supply voltage:

600041 (EVP45) 220 V/1N ph/50/60 Hz

Total Watts:

1.1 kW

Key Information:
Pump: 20 m³/h

External dimensions, Width: 550 mm

External dimensions, Height: 500 mm


External dimensions, Depth: 645 mm

Sealing bar length: 450 mm

Net weight (kg): 80

Useful chamber size: 466 x 405 x117(H) mm

Side

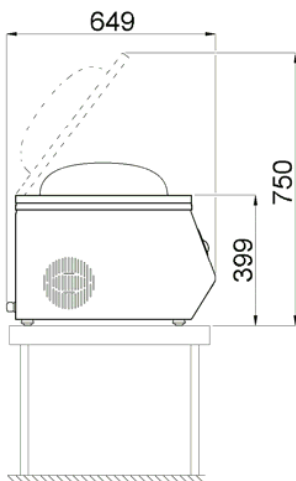

EI = Electrical inlet (power)

Other

