

Modular Cooking Range Line 700XP Full Module Gas PowerGrill Top

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		
AIA #		



371043 (E7GRGHGC0P)

Full module gas PowerGrill Top - HP

Short Form Specification

Item No.

Unit to be Electrolux 700XP Full Module Gas **PowerGrill** top. Unit to have high efficiency 14 kW Stainless steel gas burners with flame failure device, optimized combustion and protected pilot light. Suitable for natural gas or LPG. Unit to be installed on open base installations, bridging supports or cantilever systems. Cooking surface grids to be of cast iron, easily removable for cleaning. Exterior panels of unit in Stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick Stainless steel. Unit has right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Stainless steel burners with flame failure device, optimized combustion and protected pilot light.
- AISI 441 stainless steel deflective shields located below the radiants prevent burners from clogging, minimize flare ups and ensure even heat distribution (PATENT PENDING).
- Dishwasher-safe radiants removable without the use of tools to facilitate cleaning.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- Cooking grids made in highly resistant enameled cast iron for easy cleaning.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPx4 water protection.

APPROVAL:



Modular Cooking Range Line 700XP Full Module Gas PowerGrill Top



Modular Cooking Range Line 700XP Full Module Gas PowerGrill Top


Optional Accessories


Optional Accessories		
• Junction sealing kit	PNC	206086
• Draught diverter, 150 mm diameter	PNC	206132
Matching ring for flue condenser, 150 mm diameter	PNC	206133
• Support for bridge type installation, 800mm	PNC	206137
• Support for bridge type installation, 1000mm	PNC	206138
• Support for bridge type installation, 1200mm	PNC	206139
• Support for bridge type installation, 1600mm	PNC	206141
• Flue condenser for 1 module, 150 mm diameter	PNC	206246
Right and left side handrails	PNC	206307
• Back handrail 800mm, Marine	PNC	206308
• Scraper kit with hooks for HP grills	PNC	206347
• Frontal handrail, 800mm	PNC	216047
• Frontal handrail, 1200mm	PNC	216049
• Frontal handrail, 1600mm	PNC	216050
• Large handrail - portioning shelf, 800mm	PNC	216186
 2 side covering panels for top appliances 	PNC	216277
 Pressure regulator for gas units 	PNC	927225






Modular Cooking Range Line 700XP Full Module Gas PowerGrill





EQ = Equipotential screw

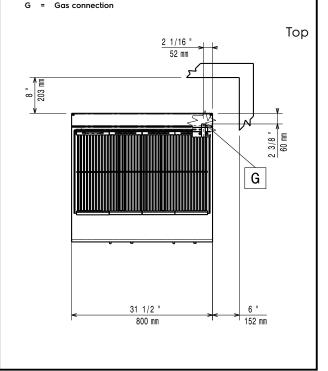

Gas

Gas Power:

371043 (E7GRGHGC0P) 14 kW

Standard gas delivery: Natural Gas G20 (20mbar)

Gas Type Option:

Gas Inlet: 1/2"

Key Information:

Cooking surface width: 742 mm Cooking surface depth: 472 mm Net weight: 60 kg Shipping weight: 88 kg Shipping height: 580 mm Shipping width: 820 mm Shipping depth: 860 mm Shipping volume: 0.41 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat

insulation fitted.

Certification group: N7EGG

